


105MASパイル W (特厚)

『105MASパイルW』は、コンクリートの設計基準強度105N/mm²の特厚タイプのPHCくいであり、(財)日本建築センター基礎評定委員会の評定を取得した製品です。

【標準断面図】

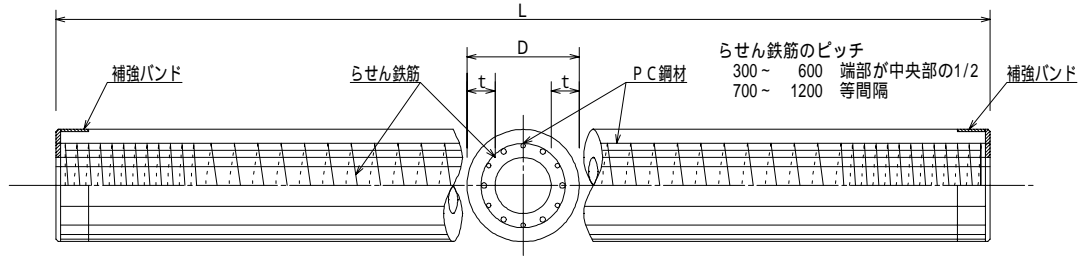

【設計諸数値】

コンクリートの許容応力度

くいの種類		基準強度 (N/mm ²)	長期許容応力度 (N/mm ²)			短期許容応力度 (N/mm ²)		
			圧縮	曲げ引張	斜張	圧縮	曲げ引張	斜張
105MAS パイル W	A	105	30.0	1.0	1.2	60.0	2.0	1.8
	B			2.0			4.0	
	C			2.5			5.0	

【断面性能表】(300mm ~ 1200mm)

外径 D (mm)	種類	有効プレ ストレス (N/mm ²)	厚さ t (mm)	長さ L (m)	断面積 A × 10 ² (mm ²)	P C 鋼材			換 算 断 面 積 A _e × 10 ² (mm ²)	換 算 断 面 二 次 モ ー メ ン ト I _e × 10 ⁴ (mm ⁴)	参考質量 W (t/m)
						径 (mm)	本数	断面積 A _p (mm ²)			
300	A	4.0	65	4 ~ 13	480	7.1	6	240	490	36,352	0.125
	B	8.0		4 ~ 15		9.0	8	512	500	37,160	
	C	10.0		9.0		10	640	506	37,535		
350	A	4.0	65	4 ~ 13	582	7.1	7	280	593	63,340	0.151
	B	8.0		4 ~ 15		9.0	10	640	608	64,891	
	C	10.0		9.0		12	768	613	65,437		
400	A	4.0	75	4 ~ 15	766	7.1	10	400	782	108,730	0.199
	B	8.0		9.0		12	768	797	110,850		
	C	10.0		10.7		11	990	806	112,180		
450	A	4.0	80	4 ~ 15	930	9.0	8	512	950	170,270	0.242
	B	8.0		9.0		16	1,024	971	173,960		
	C	10.0		10.7		14	1,260	980	175,760		
500	A	4.0	100	4 ~ 15	1,257	9.0	9	576	1,280	272,120	0.327
	B	8.0		10.7		14	1,260	1,307	278,260		
	C	10.0		10.7		17	1,530	1,318	280,660		
600	A	4.0	110	4 ~ 15	1,693	9.0	12	768	1,724	543,810	0.440
	B	8.0		10.7		18	1,620	1,758	555,050		
	C	10.0		10.7		23	2,070	1,776	560,950		
700	A	4.0	120	4 ~ 15	2,187	10.7	11	990	2,227	977,830	0.568
	B	8.0		10.7		22	1,980	2,266	996,860		
	C	10.0		12.6		22	2,750	2,297	1,011,660		
800	A	4.0	130	4 ~ 15	2,736	10.7	14	1,260	2,786	1,625,000	0.711
	B	8.0		10.7		28	2,520	2,837	1,656,700		
	C	10.0		12.6		28	3,500	2,876	1,681,400		
900	A	4.0	140	4 ~ 15	3,343	10.0	20	1,570	3,406	2,544,300	0.869
	B	8.0		10.0		40	3,140	3,469	2,593,300		
	C	10.0		11.2		40	4,000	3,503	2,620,100		
1000	A	4.0	150	4 ~ 15	4,006	10.0	24	1,884	4,081	3,803,100	1.041
	B	8.0		10.0		48	3,768	4,157	3,876,100		
	C	10.0		11.2		48	4,800	4,198	3,916,100		
1100	A	4.0	160	4 ~ 15	4,725	11.2	22	2,200	4,813	5,475,500	1.228
	B	8.0		11.2		44	4,400	4,901	5,581,200		
	C	10.0		12.6		44	5,500	4,945	5,634,000		
1200	A	4.0	170	4 ~ 15	5,501	11.2	26	2,600	5,605	7,645,200	1.430
	B	8.0		11.2		52	5,200	5,709	7,796,900		
	C	10.0		12.6		52	6,500	5,761	7,872,700		